



TOP VIEW OF CHASSIS

13B

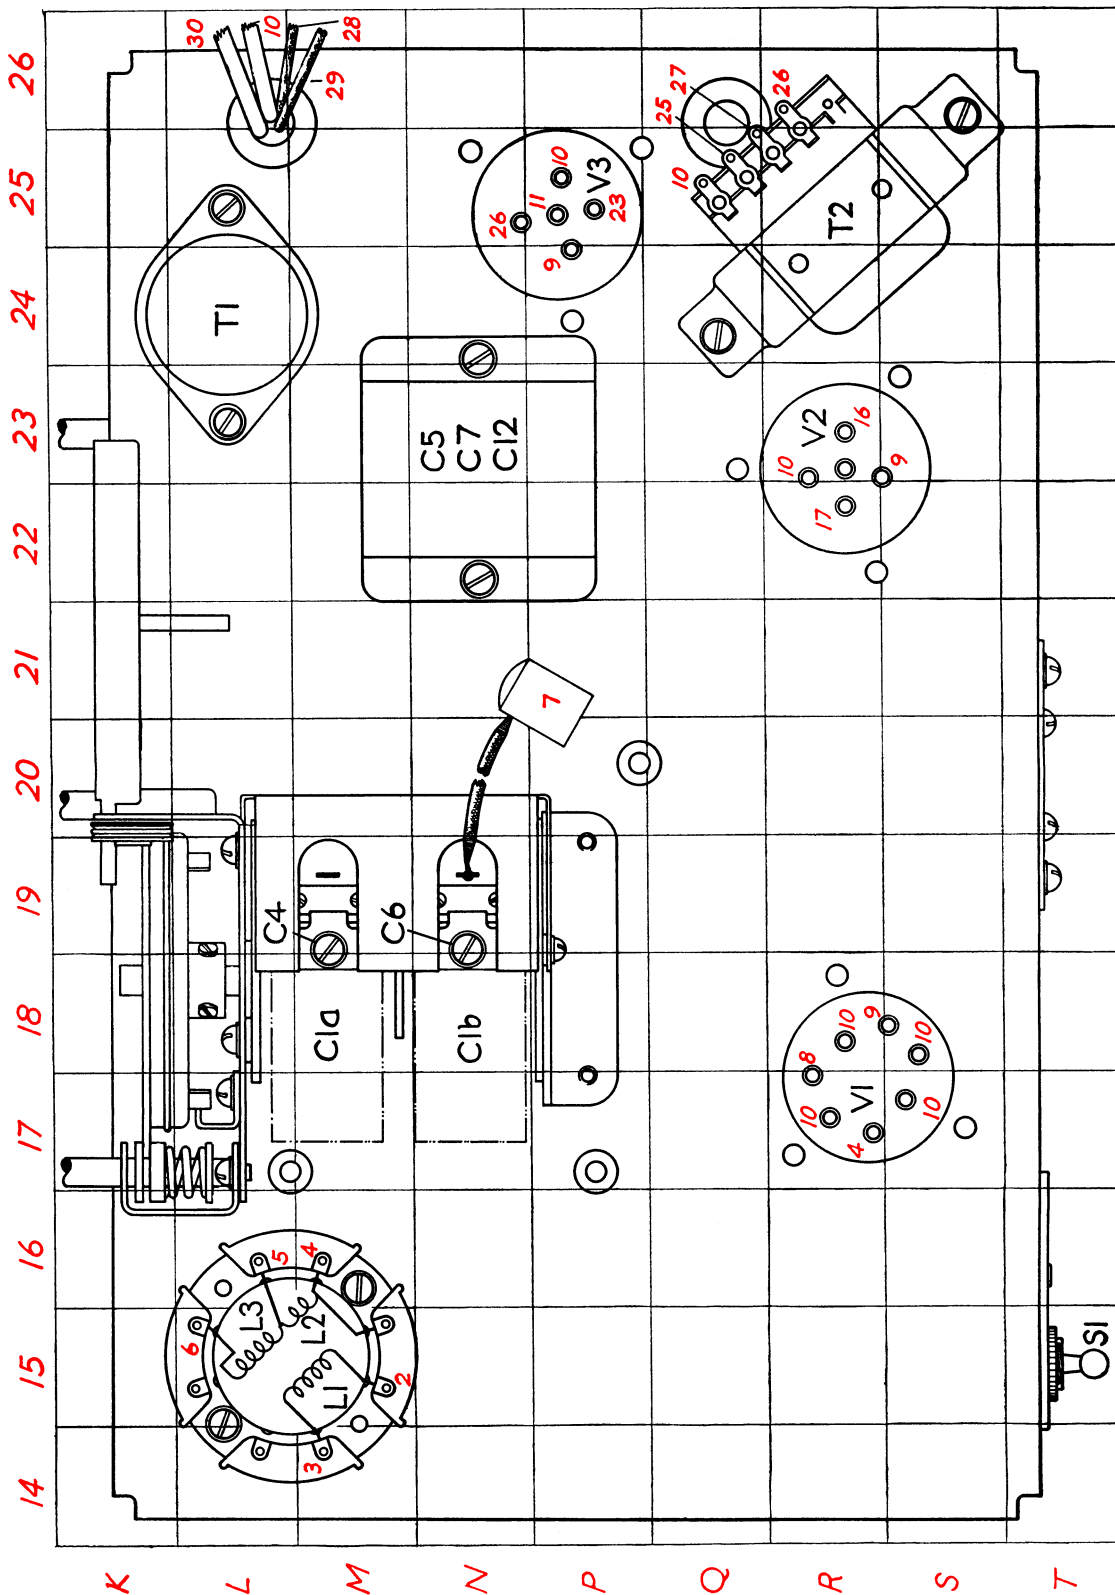

UNDERSIDE VIEW OF CHASSIS

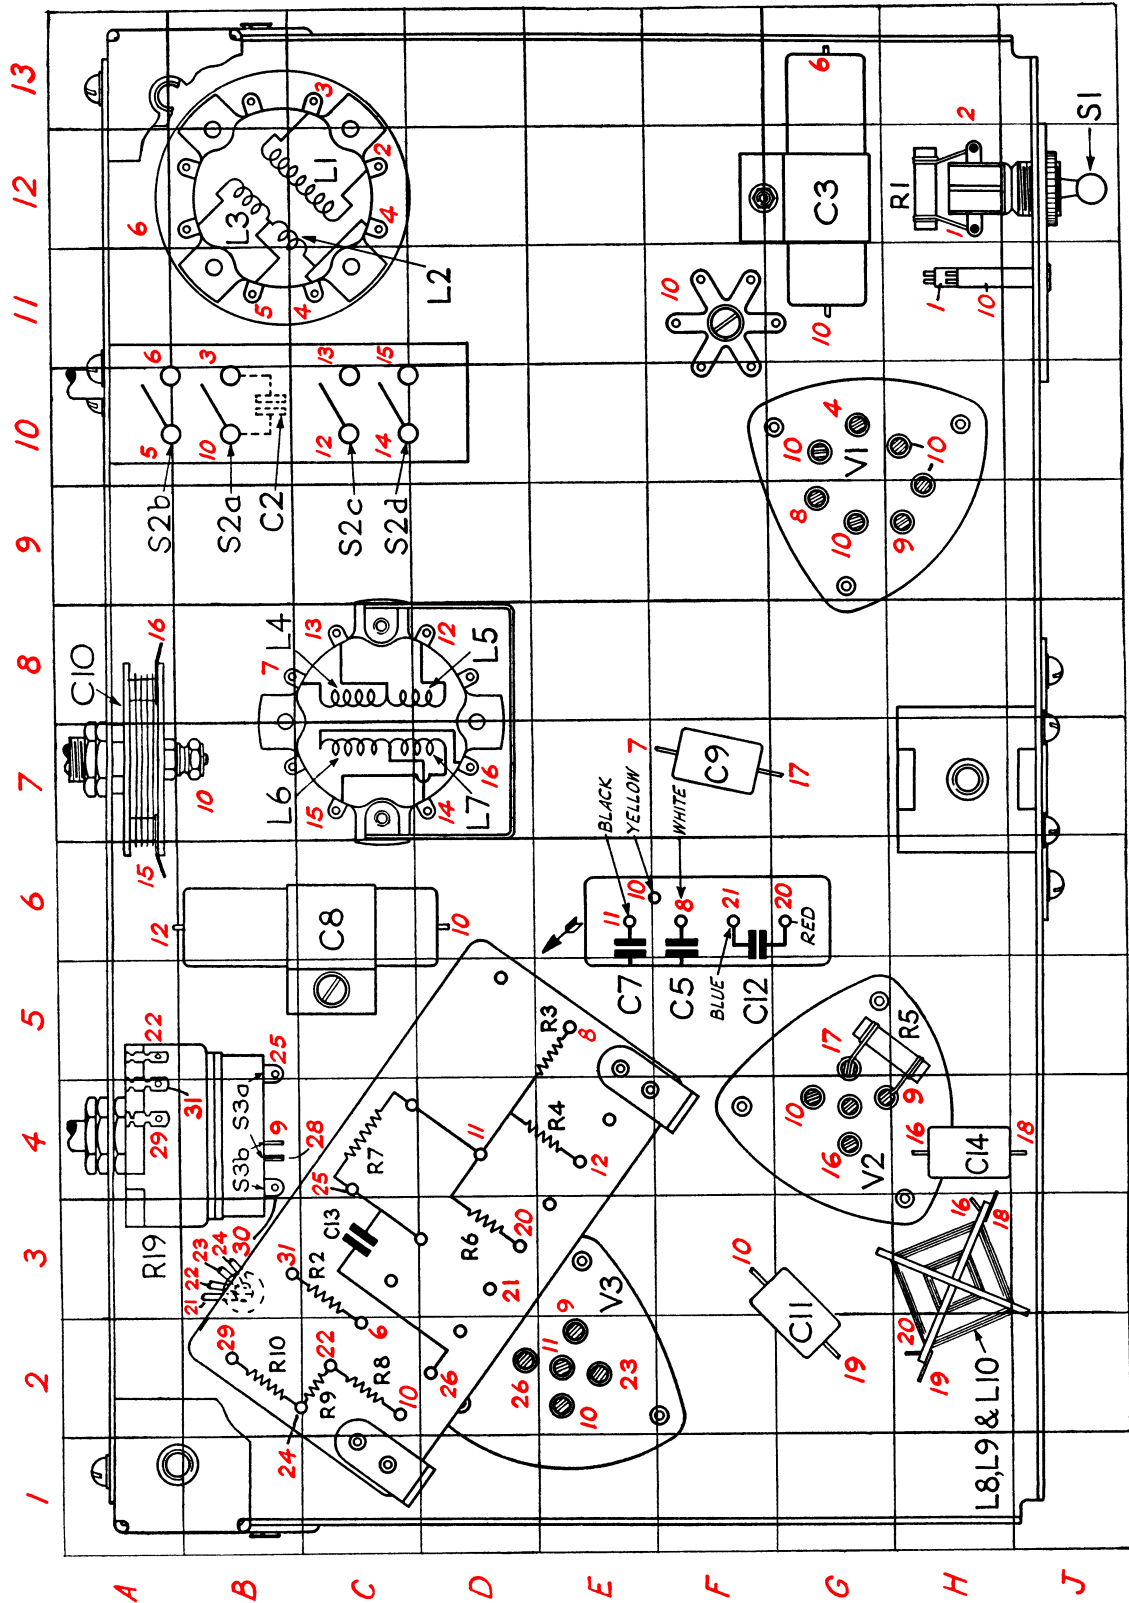

CIRCUIT DIAGRAM

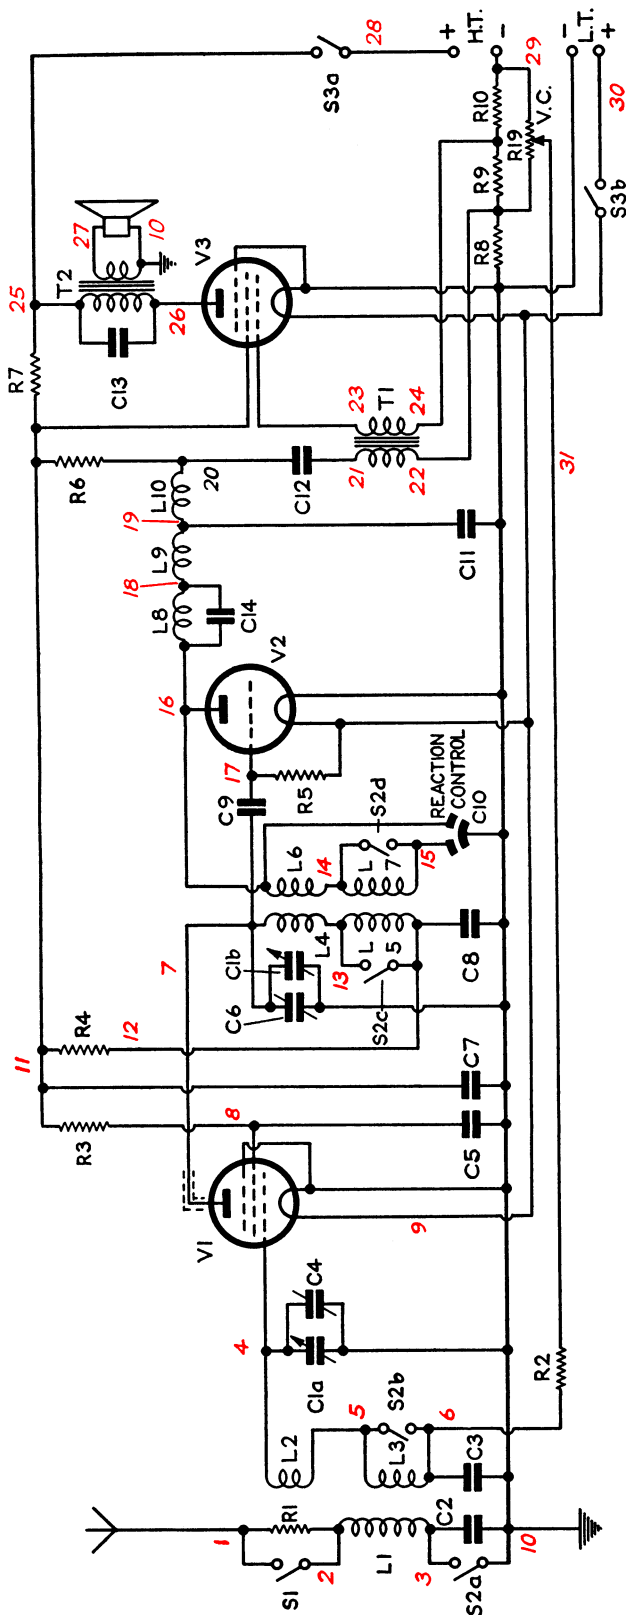


TABLE OF COMPONENTS									
CODE	VALUE	SQUARE	TEST Fm. To	CODE	VALUE	SQUARE	TEST Fm. To	CODE	VALUE
C1A	.0005	18 M	4 10	C8	.1	6 C	10 12	R1	100,000
C1B	.0005	18 N	7 10	C9	.0001	7 F	7 17	R2	1 MΩ
C2	.0005	10 B	3 10	C10	.0003	7 A	10 15	R3	100,000
C3	.1	12 G	6 10	C11	225 μμ f	3 G	10 19	R4	20,000
C4	Trimmer	19 N	4 10	C12	.1	6 F	20 21	R5	2 MΩ
C5	.1	6 F	8 10	C13	.002	3 C	25 26	R6	100,000
C6	Trimmer	19 N	7 10	C14	125 μμ f	4 H	16 18	L1	15
C7	2-25	6 E	10 11	R7	2,000	4 C	11 25	L2	4
R1	100,000	12 H	1 2	R8	150	2 C	10 22	L3	12
R2	1 MΩ	3 C	6 31	R9	150	2 C	22 24	L4	4
R3	100,000	5 E	8 11	R10	850	2 B	24 29	L5	12
R4	20,000	4 E	11 12	R19	100,000	4 A	22 29		
R5	2 MΩ	5 H	9 17						
R6	100,000	3 D	11 20						
L1	15	12 C	2 3	L6	1-25	7 C	14 16		
L2	4	12 B	4 5	L7	6-5	7 D	14 15		
L3	12	12 B	5 6	L8	5	3 H	16 18		
L4	4	8 C	7 13	L9	2	3 H	18 19		
L5	12	8 D	12 13	L10	50	3 H	19 20		
T1 Prim	190	{	24 L	T2 Prim	414	{	25 R		
Sec.	600		21 23	Sec.	0-15		10 27		

TABLE OF VOLTAGES

COMPONENT	TYPE	ELECTRODE	TEST POINT	IN SQUARE	VOLTS
V1	Mazda VP210	Anode (v/c max)	7	21 N	62
		Anode (v/c min)	7	21 N	95
		Screen (v/c max)	8	9 G	50
		Screen (v/c min)	8	9 G	78
V2	Mazda HL2	Anode	16	4 G	38
V3	Mazda Pen231	Anode	26	2 D	110
		Screen	11	2 E	108
H.T.-Plug			29	26 L	-10
Total Current (v/c max) 6-8 M.a.					
(v/c min) 6-25 M.a.					